


INTEGRATION OF COMMEND INTERCOM



PRODUCT DATASHEETS

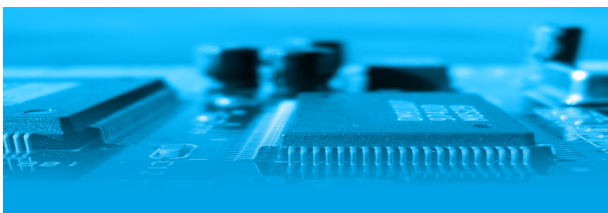

Highlights

FAST PROCESSING OF INFORMATION

The interactions between the different systems can be completely automated (actions on events).

EASY TO USE

Perform the majority of communications from any MICRO-SESAME operating station.

FOLLOW-UP OF ACTIONS

All calls and status changes are plotted in the MICRO-SESAME history.



Operate intercoms from MICRO-SESAME

The generic text driver of Micro-SESAME allows you to interact with many intercom equipment.

The settings developed for COMMEND IP (GE300 and GE800) or COMMEND digital (GE700) enable the majority of the current communication operations to be carried out from any MICRO-SESAME operating station.

Main features

- Display of intercom calls to the master station
- Differential treatment according to 2 levels: normal or emergency communication
- Call pickup, interruption or cancellation
- Total virtualization of the master station (with microphone and speakers connected directly to the operating MICRO-SESAME station)
- Connection of 2 intercom stations (activation button in the graphic supervision or on the keyboard of the virtual master station)
- Remote listening
- Transferring calls from the master station to another station (for example depending on day or night)

OUR OFFERINGS

SOFTWARE



HARDWARE



SERVICES



INTEGRATION OF COMMEND INTERCOM

Advanced interaction

- With the COMMEND integration in MICRO-SESAME, the intercom functions are controlled directly from the same graphic supervisor as all other building security systems (access control, video, BMS ...). Exploitation becomes much simpler for the user and the interventions are more effective.

There is a fast processing of information because the interactions between the different systems can be completely automated (actions on events). For example, the intercom call can video servoing for visual inspection of the access.

Of course, other automations managed by Micro-SESAME can be considered (lighting, etc.).

Finally, all calls and changes in status are also plotted in the history of MICRO-SESAME.

References & System Requirements

COMMEND compatible stations

- GE300 (IP)
- GE800 (IP)
- GE700 (digital)

MICRO-SESAME versions

- From version 2.950

Required MICRO-SESAME options

- Generic text driver (MS-TXT)

Interface

- If the COMMEND station is distant from the MICRO-SESAME server (station remotored on the network), it requires connection via IP-Serial converter (C821-BT)

Sales Contact : sales@til-technologies.com